
§06 · THE EXAMINER ASKS

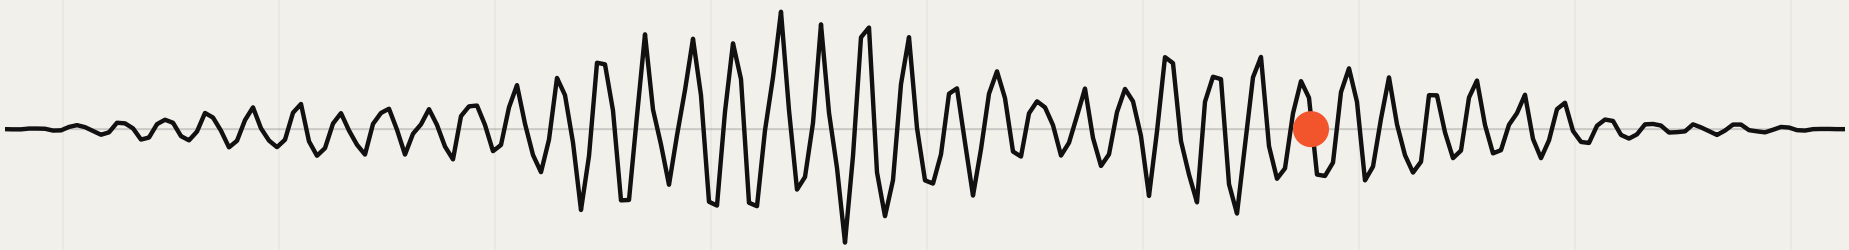

“You've got a scavenge fire. Talk me through it.”

CAUSE · INDICATION · ACTION · PREVENTION

SWIPE →

§06 — 01 / CAUSE — FIG. 06.2

06.2

Oil residue, and something to light it.

Oil and carbon residue builds up in the scavenge space from cylinder lubrication and poor combustion. Hot gas blowing past worn or stuck piston rings ignites it. A choked scavenge drain makes it worse.

GENERIC GUIDANCE · FOLLOW YOUR ENGINE MAKER'S INSTRUCTIONS AND COMPANY PROCEDURES

§06 —— 02 / INDICATION —— FIG. 06.3

06.3

What you'd notice first.

- Exhaust temperature ..... HIGH ON ONE UNIT
- Turbocharger ..... SURGING
- Funnel ..... SPARKS / BLACK SMOKE
- Scavenge casing ..... HOT, PAINT BLISTERING

GENERIC GUIDANCE · FOLLOW YOUR ENGINE MAKER'S INSTRUCTIONS AND COMPANY PROCEDURES

§06 — 03 / ACTION — FIG. 06.4

In order.

01 Inform the bridge and the Chief Engineer.

02 Reduce to slow, or stop if it's safe to do so.

03 Keep the engine turning and lubricated.

04 Boundary cool the scavenge trunk.

05 If it persists, smother it: the fixed system into the scavenge space.

06 Don't open up until it has cooled.

GENERIC GUIDANCE · FOLLOW YOUR ENGINE MAKER'S INSTRUCTIONS AND COMPANY PROCEDURES

§06 —— 04 / PREVENTION —— FIG. 06.5

06.5

Deny it the fuel.

01 Keep scavenge spaces clean.

02 Keep ring and liner clearances in tolerance.

03 Drain the scavenge drains regularly.

04 Maintain injectors and good combustion.

GENERIC GUIDANCE · FOLLOW YOUR ENGINE MAKER'S INSTRUCTIONS AND COMPANY PROCEDURES

§06 — WATCH OUT FOR !

The answers that cost marks.

- ! Stopping the engine dead instead of keeping it turning and lubricated.
- ! Opening the scavenge space before it has cooled.

EXPECT THESE FOLLOW-UPS

- Q1 What are the early indications?
- Q2 Why keep the engine turning and lubricating?
- Q3 What causes the blow-by in the first place?

§06 — NEXT STEP — WAITLIST OPEN

This is the kind of question the examiner will ask.

And then follow up. Join the waitlist for first access.

JOIN THE WAITLIST →

ORALROOM.APP/WAITLIST

• IN BUILD · BUILT AT SEA